
# **ASTRA LINEAR SERIES**

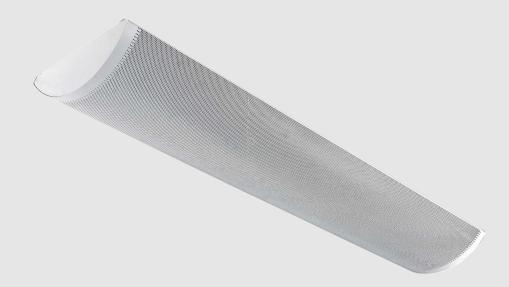

## Description

Reflected from the ceiling, the **Luxlogic Astra** direct-indirect linear lighting
system creates soft and diffused lighting
that ensures maximum visual comfort
and balanced shadows.

Users can fit and setup this luminaire as direct or direct/indirect lighting. Stylish architectural profile designed to be suspended via aircraft cable, applicable in damp locations.

Fixtures are connectible to form continuous run. Meets current lighting demands for computer screens meeting low brightness/glare control needs. Low profile design optimizes shipping, storage, and handling.

Astra available in 4 feet (80W and 100W)) with an efflicacy of 75 lumen/watt.

#### Glare control

Astra fights efficiently against irritating computer screen glare. The strong glare will blur the vision on the computer screen. Worker may need to tilt head constantly during work.

# **Certifications and Warranty** CE and cUL with 6 year warranty






# ASTRA - 4' 80W/100W









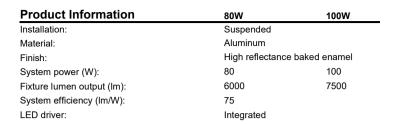



Light source information


LED typology:	SMD	
LED power consumption (W):	80	100
Lumen output 3000K CRI 80 (Im):	9600	12000
LED efficiency (lm/W):	120	120



Net weight lamp (kg/lb):	8.0 / 17.64	8.5 / 18.74
Gross weight carton (kg/lb):	10.0 / 22.05	10.5 / 23.15
Master carton dimensions (mm/in):	1340x320x150 / 52.76x	12.60x5.91
Quantity per carton:	1	1


## **Code Composition**

Series	Model	Size	Mounting	<b>Luminous Ways</b>	Wattage-Lumens
<b>LN</b> Linear	<b>AST</b> Astra	<b>4F</b> 4 Feet	SP Suspended	<b>D</b> Down	80W-60L 80W-6000lm
			, , ,	<b>UD2</b> 25%Up &	
			with 5t Cable Included)	75% Down	




CCT		CR		Volta	ge	Dim	nming	Finish	Acc	essor	ries
30K	3000K	80	+08	UNV	120-277V	ND	No Dimming	WH White	NA	No	Accessories
35K	3500K			CHV	347-480V	D	0-10V	<b>BK</b> Black			
40K	4000K						Dimming	<b>GR</b> Grey			

# Up&Down-4000K-CRI80



## **Code Composition**

Series	Model	Size	Mounting	Luminous Ways	Wattage-Lumens		
LN Linear	AST Astra	<b>4F</b> 4 Feet	SP Suspended (Canopy Cover with 5t Cable Included)	<b>UD1</b> 20%Up & 80% Down	<b>100W-75L</b> 100W-7500lm		



CCT	CCT		CRI		Voltage		nming	Finish		essor	ies
30K	3000K	80	+08	UNV	120-277V	ND	No Dimming	WH White	NA	No	Accessories
35K	3500K			CHV	347-480V	D	0-10V	<b>BK</b> Black			
40K	4000K						Dimming	<b>GR</b> Grey			

### Up&Down-4000K-CRI80

UP&DOWII-4000K-CRIOU									
1800 150° 120° -CD:0 0° 30° -	H(m) 2 4 6 8 10	244.7 61.2	) D/B(M) 1.60/6.20 3.20/12.4 4.80/18.5 6.40/24.7 8.00/30.9						
■0° ■90°	l								

